

NEW! ENDCUTTER WITH CABLE TOW



Image w/o. table.
Table can be ordered separately.



Endcutter

This new version.18 is equipped with a cable towing device as standard, so the cable runs in a drag chain under the cutting device in a U-shaped channel. All made in anodized matt aluminum or RAL 9006 coated. This endcutter has no annoying cable floating device above the workplace and cuts all textile materials and synthetic fibers from 80g / sqm to 800g / sqm. The built-in grinder sharpens the knife itself - the large diameter of 100 mm ensures extremely low grinding cycles. Fits existing trimming tables or our


adjoining. Please sketch table height above, thickness of table top and table overhang (preferably 20 cm) when ordering. The 2m machine has a max. Cutting width of 180 cm. This system will also be available in other widths - e.g. Cutting width 3,2m - delivered. 230 VAC, 16 A.

Artikel-Nr.	Ausstattung
3.533.RM.2M	Automatic Endcutter mit linear actuator, cutting width 180 cm
3.533.RM.3M	Automatic Endcutter mit linear actuator, cutting width 320 cm (3.533.RM.ECO)
61.303.22	replacement blade round
61.303.23	replacement blade 8-arc
Other widths on request.	
388.623.20	unwind cradle up to 2m
388.623.35	unwind cradle up to 3,3m
3.533.DL	pneumatic pressure rail, mandatory for ultra-cutting systems, see also Multicut, optionally for rotary blade cutting systems. For extremely exact cuts if, for example, a picture should be cut. Air 3-4bar required, kit is attached to the edge of your trimming table, bore of min. 2 holes needed..

Cuttingmachine with ultrasonic and / or driven blade.

The ultrasonic machine is either available as only ultrasonic or as a blade cutting machine or as a twin version with 2 cutting systems. On one side - we do have a cradle as shown - the material may be pulled manually on the table - the cutter runs from below and gives a perfect result - especially by assistance of the save clamping bar.

On the ultrasonic version - the clamping bar is covered by plexiglas in series and works air-operated right and left of the cutting line - the cutting speed can be adjusted according to the material.

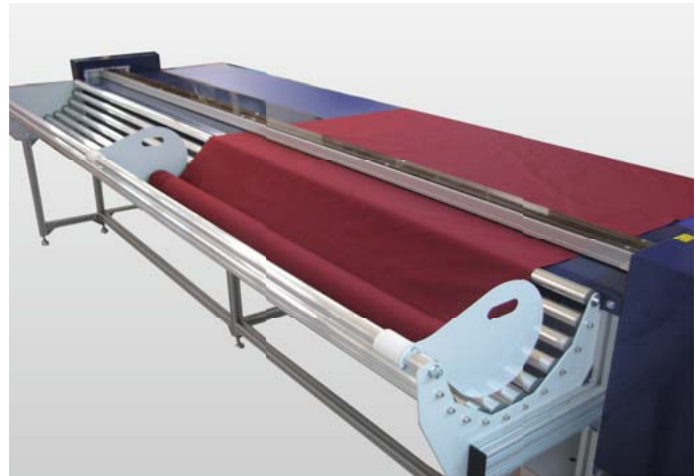


Softstart is also in series, because it is very helpful on special textiles as well as the quick return – this saves time.

This module fits to any existing table – you may order a new table as well – just tell us the size.

Art.No.	Equipment
3.530.3	Ultrasonic cutting 300/320 cm with cradle, airoperated clampbeam, motorised driven Ultrasonic cutting head, 230 V AC
3.530.3 RM	dto. linear cutting system: with roundknife - incl. cutter and special holder - 3 m x 3 m table
3.530.3TWIN	dto. with add. roundbladecutter motorised driven, alternatively to the ultrasonic system to use - 2 machines in one!
3.530.5TWIN	dto. in 500/520 cm Ultrasonic + roundknife
3.530.5	dto. 3.530.3 in 5 m
3.500.5	Laserline shows the cutting line
601.300	Cutting table, stable frame, height 90 cm, multilayer board, available in all lengths and widths, each sqm.

Cutting machine with many options – ultrasonic and / or blade

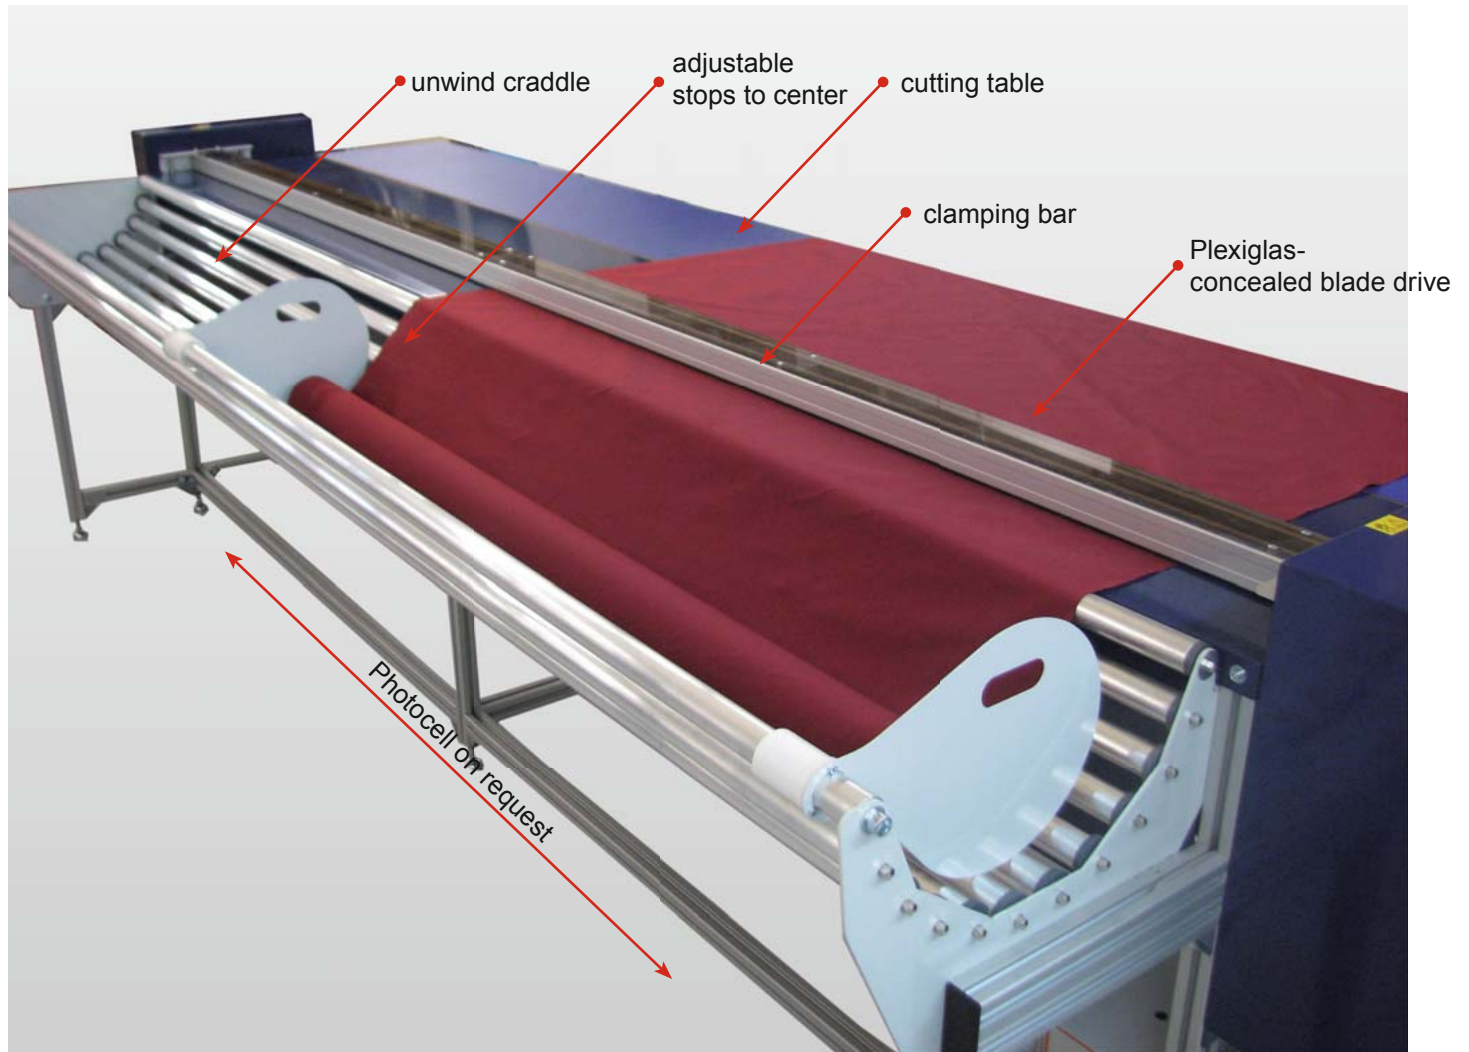



CUTTING TABLE - MULTILAYERED AND DOUBLE COATED

Stable frame, height 90 cm, multilayer board, available in all lengths and widths, each sqm.

Art. No.	Features
601.300	Standard grey-beige (375>16sqm)
601.300 B	dark blue-extremely smooth (388)
601.300.1	Partition possible / sqm



CRADLES

The perfect equipment for the studio is the **PULL-OFF DISPENSER.**

The fabric roll can easily be removed and placed right-angled to the edge of the cutting-table by one person.

Adjustable for rolls of cloths up to 35 cm Ø

Suitable for every cutting-to-size-table, height is adjustable. Suitable for every table!

Please ask for any size.

Art. No.	Features
388.623.20	width: up to 2 m
388.623.30	width: 3,30 m